


AudioCodes CPE & Access Gateway Products

MP-20x series

MediaPack™ Series Telephone Adapters with Integrated Router



- Residential and SOHO telephony for Voice over Broadband (VoB) networks
- Toll quality voice compression and wide-band vocoders
- Standard T.38 Fax support
- Easy integration into existing network
- Rich set of subscriber calling features
- Integrated router capabilities

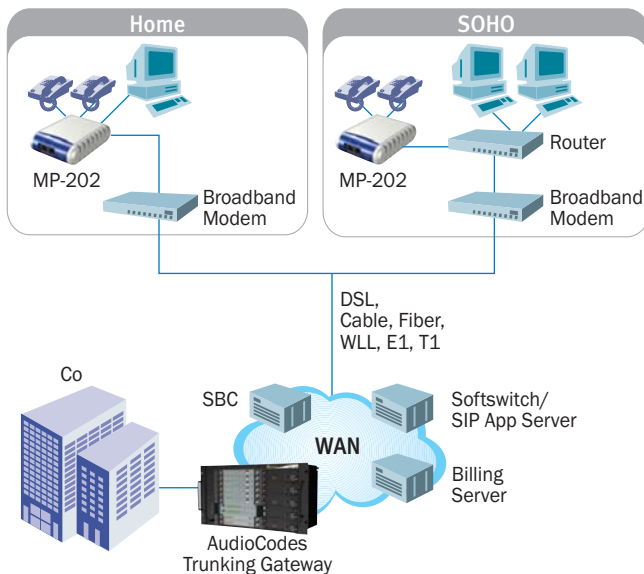

Part of the **MediaPack series** of analog VoIP gateways, the **MP-20x series** of Telephone Adapters are cost-effective, cutting edge products, which allow connecting ordinary analog telephones or fax machines to a Voice over Broadband (VoB) service.

As the rest of the MediaPack gateways, the MP-20x series of Telephone Adapters are well-suited for commercial VoIP deployments. Field proven voice and fax technology and feature rich design makes them an excellent choice for Voice over Broadband (VoB) service providers and operators.

DESIGNED FOR RESIDENTIAL AND SOHO IP TELEPHONY

The MP-20x series is designed for the rapidly growing residential and Small Office /Home Office (SOHO) VoIP market. The MP-20x series typically connects to an existing Broadband Internet device (cable or DSL modem), and establishes a communications path with the Service Provider network via its IP Uplink connection. The MP-20x series provide up to 2 VoIP ports for connecting up to 2 POTS lines or fax machines. Supporting a rich set of subscriber calling features such as caller ID, Call Forward, and Call Waiting, the MP-20x series maintains a uniform user experience when migrating to VoIP services. In addition, the MP-20x Series serves as a router, supporting connectivity of a PC or LAN hub/switch, and including NAT (Network Address Translation), DHCP, PPPoE functions required for simultaneous telephone and Internet usage, as well as a built-in firewall.

BENEFIT FROM EXTENSIVE EXPERIENCE

Utilizing Audiocodes' VoIPerfect™ core architecture, and gaining from its accumulated experience in providing IP telephony solutions, the MP-20x series combines superior voice quality and "state of the art" features for end users, such as T.38 Fax Relay and G.168-2004 compliant Echo Cancellation. Low bit-rate vocoders (voice coders) can be used simultaneously on both telephony ports to save valuable bandwidth. The "Voice over Data" prioritization algorithm prevents degradation in voice quality even during large data transfers.

INTEROPERABILITY

The MP-20x Series is designed for full interoperability with leading Softswitches and SIP Servers for deployment in various network environments. Throughout the years, AudioCodes has invested significant effort in complying with the leading and evolving VoIP standards. Support of the Session Initiation Protocol (SIP), which is commonly found in Voice over Broadband (VoB) networks, assures seamless integration and rapid deployment.

MP-20x KEY FEATURES:

- Seamlessly connect Fax and Telephone over broadband infrastructure
- Best of breed voice quality, based on Audiocodes' VoIPerfect™ core architecture
- Rich telephony features including Caller ID, Call Waiting, 3-Way calling, and more
- Interoperable with SIP-compliant devices including Softswitches, Application Servers, Media Servers, and other gateways
- Second Ethernet port for LAN/PC connectivity
- Router functionality with prioritized voice over data traffic (when connected to a broadband modem)

AudioCodes CPE & Access Gateway Products

MP-20x series MediaPack™ Series Telephone Adapters with Integrated Router

SPECIFICATIONS

Voice Ports	MP-201 – 1 telephony port* MP-202 – 2 telephony ports
Telephone Interfaces	RJ11 connector
Network Interface	LAN I/F (Uplink): RJ-45 - 10/100 Base-T LAN I/F (Down link): RJ-45 - 10/100 Base-T
Telephony Features / Signaling	FXS Loop Start FXO* DTMF – Detection and Generation, TIA464B Caller ID (type 1 & 2) Call Hold Call Transfer 3-way conferencing Call Waiting Call Forward*
VoIP Signaling Protocols	SIP – RFC 3261 MGCP – RFC 2705*
Data Protocols	IPv4, TCP, UDP, ICMP, ARP PPPoE – RFC 2516, PPTP DNS, Dynamic DNS IEEE 802.1p/q (QoS & VLAN tagging) ToS/Diffserv Layer 2 switching or WAN to LAN Layer 3 routing with: • DHCP Client/Server – RFC 2132 • RIP V1/V2 and static routing • NAT – RFC3022, Application Layer Gateway (ALG) • Voice over Data prioritization • Firewall & URL filtering
Media Processing	Voice Coders - G.711, G.723.1, G.729A/B, iLBC, GSM FR* Wideband Coders* - G.722, G.722.2 (WB-AMR) Fax – T.38, network delay up to 10 msec Echo Cancellation – G.168-2004 compliant, 64 msec tail length Silence Suppression – VAD, CNG Adaptive Jitter Buffer 300 msec
Packetization	RTP/RTCP Packetization – RFC 3550, 3551, 2198 DTMF Relay - RFC 2833
Provisioning	Embedded Web Server for Configuration and Management Software and Configuration upgrade from HTTP Integrated SNMP agent CLI over Telnet Syslog support for debug and diagnostics Configurable Call progress tones Configurable line characteristics
Security	HTTPS for Web-based configuration Password protected Web pages (MD5) IPSec for media streaming and data traffic
LEDs Indications	Ethernet activity Phone activity Power
Power	+12VDC, 0.6A Power adaptor: 110VAC/220VAC to 12VDC, 1A

* Please contact AudioCodes for specific software availability

APPLICATIONS

- Voice over Broadband (VoB)
- Residential Telephony
- SOHO VoIP Telephony
- Converged Access

ABOUT AUDIOCODES

AudioCodes Ltd. (NASDAQ: AUDC) enables the new voice infrastructure by providing innovative, reliable and cost-effective Voice over Packet technology and Voice Network products to OEMs, network equipment providers and system integrators. AudioCodes provides its customers and partners with a diverse range of flexible, comprehensive media gateway and media processing technologies, based on VolPerfect™ – AudioCodes' underlying, best-of-breed, core media gateway architecture. The company is a market leader in voice compression technology and is a key originator of the ITU G.723.1 standard for the emerging Voice over IP market. AudioCodes voice network products feature media gateway and media server platforms for packet-based applications in the converged, wireline, wireless, broadband access, and enhanced voice services markets. AudioCodes enabling technology products include VoIP and CTI communication boards, VoIP media gateway processors and modules, and CPE devices. AudioCodes' headquarters and R&D facilities are located in Israel with an R&D extension in the U.S. Other AudioCodes' offices are located in Europe, the Far East, and Latin America.

International Headquarters

1 Hayarden Street, Airport City
Lod, Israel 70151
Tel: +972-3-976-4000
Fax: +972-3-976-4040

US Headquarters

2099 Gateway Place, Suite 500
San Jose, CA 95110
Tel: +1-408-441-1175
Fax: +1-408-451-9520

info@audiocodes.com
www.audiocodes.com

© 2006 AudioCodes Ltd. All rights reserved. AC, Ardito, AudioCodes, AudioCoded, AudioCodes logo, IPmedia, Mediant, MediaPack, MP-MLQ, NetCoder, Stretto, TrunkPack, VoicePacketizer and VolPerfect are trademarks or registered trademarks of AudioCodes Ltd. All other products or trademarks are the property of their respective owners. The information and specifications in this document and the product(s) are subject to change without notice.

Ref. # LTRM 30008 V.1 02/06

